

**Ex Compact**

Material:	Messing vernickelt	Material:	brass, nickel-plated
Dichteinsatz:	NBR	Sealing insert:	NBR
O-Ring:	FPM	O-ring:	FPM
Einsatztemperatur:	-60°C bis 105°C	Temperature range:	-60°C to 105°C
Schutzart:	IP 66/IP 68 (30 bar)	Protection type:	IP 66/IP 68 (30 bar)
Zertifikate:	PTB 10 ATEX 1034 X IECEX PTB 12.0055 X	Certificates:	PTB 10 ATEX 1034 IECEX PTB 12.0055 X




118.00



II 2G Ex db eb IIC  
II 2D Ex ta IIIC

Gewinde Entry Thread AG			H mm	GL mm	Ex Compact MS	HUGRO No.
M 16 x 1,5	3 - 7	21	25	12	EX1126.17.070	118.1707.00
M 16 x 1,5	5 - 10	24	25	12	EX1126.17.100	118.1710.00
M 20 x 1,5	5 - 11	24	25	12	EX1126.20.110	118.2011.00
M 20 x 1,5	9 - 14	30	25	12	EX1126.20.140	118.2014.00
M 25 x 1,5	7,5 - 15	32	26,5	12	EX1126.25.150	118.2515.00
M 25 x 1,5	12,5 - 18	32	26,5	12	EX1126.25.180	118.2518.00
M 32 x 1,5	17 - 23	41	32	12	EX1126.32.230	118.3223.00
M 32 x 1,5	21 - 26	41	32	12	EX1126.32.260	118.3226.00
M 40 x 1,5	21 - 26	41	32	14	EX1126.40.260	118.4026.00
M 40 x 1,5	24 - 32	50	33	14	EX1126.40.320	118.4032.00
M 50 x 1,5	28 - 36	55	33	14	EX1126.50.360	118.5036.00
M 50 x 1,5	35 - 42	60	34	14	EX1126.50.420	118.5042.00
M 63 x 1,5	36 - 44	65	35	14	EX1126.63.440	118.6344.00
M 63 x 1,5	43 - 50	70	35	14	EX1126.63.500	118.6350.00

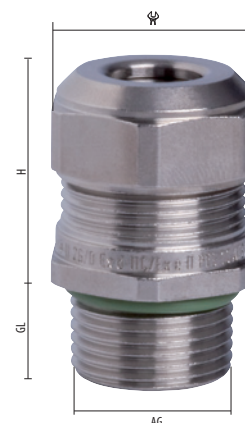

**Kabelverschraubungen  
mit Zugentlastung**

**Cable Glands  
with traction relief**

**Ex Compact / ZE-EX**

Material:	Messing vernickelt	Material:	brass, nickel-plated
Schrauben:	rostfreier Stahl A2	Screws:	stainless steel A2
Dichteinsatz:	NBR	Sealing insert:	NBR
O-Ring:	FPM	O-ring:	FPM
Einsatztemperatur:	-60°C bis 105°C	Temperature range:	-60°C to 105°C
Schutzart:	IP 66/IP 68 (30 bar)	Protection type:	IP 66/IP 68 (30 bar)
Zertifikate:	SEV 17 ATEX 0153 IECEX SEV 17.0017	Certificates:	SEV 17 ATEX 0153 IECEX SEV 17.0017



118.ZE



II 2G Ex db eb IIC Gb  
II 2D Ex tb IIIC Db

Gewinde Entry Thread AG			H mm	GL mm	Ex Compact MS KB	HUGRO No.
M 16 x 1,5	3 - 7	21	34	12	EX1826.17.070	118.1707.00.ZE
M 16 x 1,5	5 - 10	24	35	12	EX1826.17.100	118.1710.00.ZE
M 20 x 1,5	5 - 11	24	35	12	EX1826.20.110	118.2011.00.ZE
M 20 x 1,5	9 - 14	30	35	12	EX1826.20.140	118.2014.00.ZE
M 25 x 1,5	7,5 - 15	32	37	12	EX1826.25.150	118.2515.00.ZE
M 25 x 1,5	12,5 - 18	32	37	12	EX1826.25.180	118.2518.00.ZE
M 32 x 1,5	17 - 23	41	42	12	EX1826.32.230	118.3223.00.ZE
M 32 x 1,5	21 - 26	41	42	12	EX1826.32.260	118.3226.00.ZE
M 40 x 1,5	21 - 26	41	42	14	EX1826.40.260	118.4026.00.ZE
M 40 x 1,5	24 - 32	50	47	14	EX1826.40.320	118.4032.00.ZE
M 50 x 1,5	28 - 36	55	48	14	EX1826.50.360	118.5036.00.ZE
M 50 x 1,5	35 - 42	60	50	14	EX1826.50.420	118.5042.00.ZE
M 63 x 1,5	36 - 44	65	51	14	EX1826.63.440	118.6344.00.ZE
M 63 x 1,5	43 - 50	70	51	14	EX1826.63.500	118.6350.00.ZE

