

**WAZU-M/ED**

Material: Messing vernickelt  
Klemmeinsatz: PA, VO nach UL 94  
Dichteinsatz: FKM  
O-Ring: FKM  
Einsatztemperatur: -60°C bis 105°C  
Schutzart: IP 68 - 10 bar / 30 min  
IP 69 K

Material: brass, nickel-plated  
Clamping insert: PA (nylon), VO acc. to UL 94  
Sealing insert: FKM  
O-ring: FKM  
Temperature range: -60°C to 105°C  
Protection type: IP 68 - 10 bar / 30 min  
IP 69 K



154.ED

Zertifikate: KEMA 99 ATEX 6968 X  
IECEx KEM 07.0013 X

Certificate: KEMA 99 ATEX 6968 X  
IECEx KEM 07.0013 X




II 1D Ex ta IIIC Da  
II 2G Ex db IIC Gb

Weitere internationale Zulassungen vorhanden

Further international approvals available

Gewinde Entry Thread AG			H mm	GL mm	HSK-M-Ex-d	HUGRO No.
M 12 x 1,5	3 - 6,5	14	19	16	1.622.1200.50	154.1507.ED
M 16 x 1,5	5 - 10	20	22	16	1.622.1600.50	154.1710.ED
M 20 x 1,5	10 - 14	24	25	16	1.622.2000.50	154.2014.ED
M 25 x 1,5	13 - 18	30	26,5	16	1.622.2500.50	154.2518.ED
M 32 x 1,5	18 - 25	40	32	16	1.622.3200.50	154.3225.ED
M 40 x 1,5	22 - 32	50	38,5	16	1.622.4000.50	154.4032.ED
3/8" NPT	5 - 10	20	22	16	1.622.3800.70	154.3910.ED
1/2" NPT	10 - 14	24	25	20	1.622.1200.70	154.1914.ED
3/4" NPT	13 - 18	30	26,5	20,5	1.622.3400.70	154.3518.ED
1" NPT	18 - 25	40	32	25	1.622.1000.70	154.7525.ED
1 1/4" NPT	22 - 32	50	38,5	26	1.622.5400.70	154.7632.ED
1 1/2" NPT	22 - 32	50	38,5	26,5	1.622.6400.70	154.7732.ED

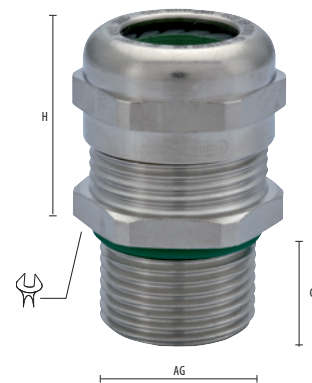

Kabelverschraubungen

mit Zugentlastung

Cable Glands

with traction relief

**WAZU-MZ/ED**

Material: Messing vernickelt  
Klemmeinsatz: PA, VO nach UL 94  
Dichteinsatz: FKM  
O-Ring: FKM  
Einsatztemperatur: -60°C bis 105°C  
Schutzart: IP 68 - 10 bar / 30 min  
IP 69 K

Material: brass, nickel-plated  
Clamping insert: PA (nylon), VO acc. to UL 94  
Sealing insert: FPM  
o-ring: FPM  
Temperature range: -60°C to 105°C  
Protection type: IP 68 - 10 bar / 30 min  
IP 69 K



155.ED

Zertifikate: KEMA 99 ATEX 6968 X  
IECEx KEM 07.0013 X

Certificate: KEMA 99 ATEX 6968 X  
IECEx KEM 07.0013 X



II 1D Ex ta IIIC Da  
II 2G Ex db IIC Gb

Weitere internationale Zulassungen vorhanden

Further international approvals available

Gewinde Entry Thread AG			H mm	GL mm	HSK-MZ-Ex-d	HUGRO No.
M 12 x 1,5	3 - 6,5	14	26	16	1.628.1200.50	155.1507.ED
M 16 x 1,5	5 - 10	20	30	16	1.628.1600.50	155.1710.ED
M 20 x 1,5	10 - 14	24	34	16	1.628.2000.50	155.2014.ED
M 25 x 1,5	13 - 18	30	38	16	1.628.2500.50	155.2518.ED
M 32 x 1,5	18 - 25	40	44	16	1.628.3200.50	155.3225.ED
M 40 x 1,5	22 - 32	50	51,5	16	1.628.4000.50	155.4032.ED
3/8" NPT	5 - 10	20	30	16	1.628.3800.70	155.3910.ED
1/2" NPT	10 - 14	24	34	20	1.628.1200.70	155.1914.ED
3/4" NPT	13 - 18	30	38	20,5	1.628.3400.70	155.3518.ED
1" NPT	18 - 25	40	44	25	1.628.1000.70	155.7525.ED
1 1/4" NPT	22 - 32	50	51,5	26	1.628.5400.70	155.7632.ED
1 1/2" NPT	22 - 32	50	51,5	26,5	1.628.6400.70	155.7732.ED

